

# SERVICE DEPARTMENT BULLETIN

## Bennett GASOLINE PUMPS

ALL 900 SERIES

ALSO APPLIES TO LATE 700 AND 800  
SERIES WITHOUT ADVERTISING PANELS

NO.  
M-125

SEPTEMBER 15, 1954

### HOW TO INSTALL DIAL AND ADVERTISING GLASS PANELS IN PUMPS CONTAINING SPECIAL LOCK-TYPE MOULDING

NOTE: IT IS FIRST NECESSARY TO REMOVE THE STAINLESS STEEL TRIM (USED ONLY ON 900 SERIES PUMPS) WHEN REPLACING A GLASS PANEL. THE EXPLODED DRAWING IN FIGURE 7 SHOWS HOW THE TRIM CAN BE DISASSEMBLED FROM THE MOULDING.

IT IS NOT NECESSARY TO REMOVE PUMP DOOR TO PERFORM ANY OF THE OPERATIONS EXPLAINED IN THIS BULLETIN.

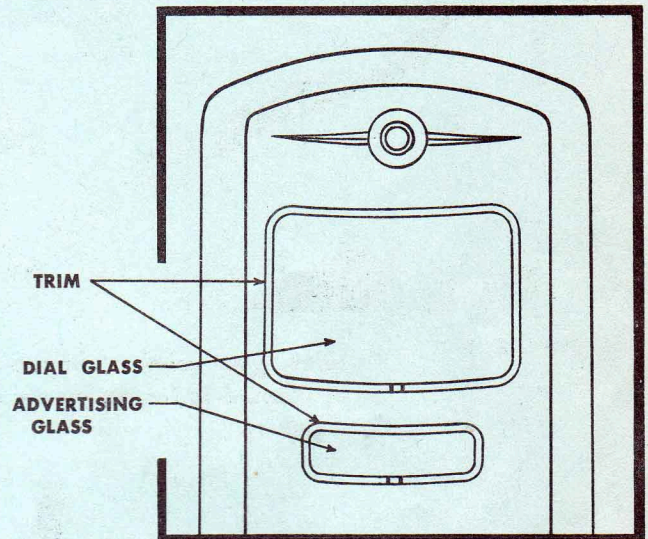


FIGURE 1

#### HOW TO INSTALL GLASS PANELS

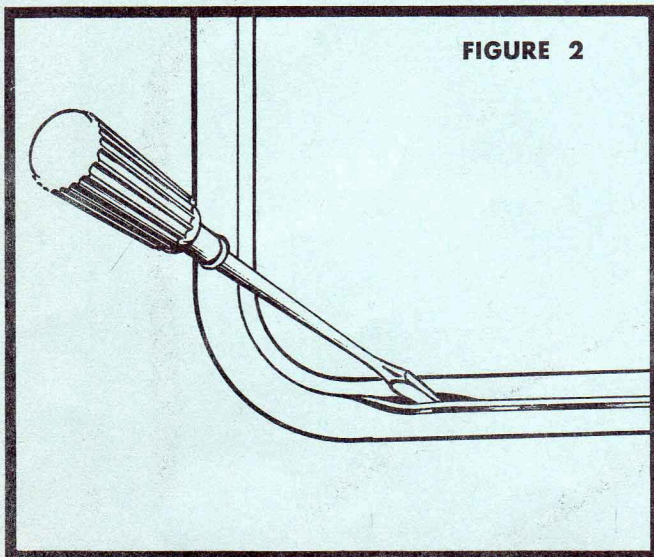


FIGURE 2

First, remove pieces of broken glass from moulding. Then, unlock moulding with a small screwdriver.

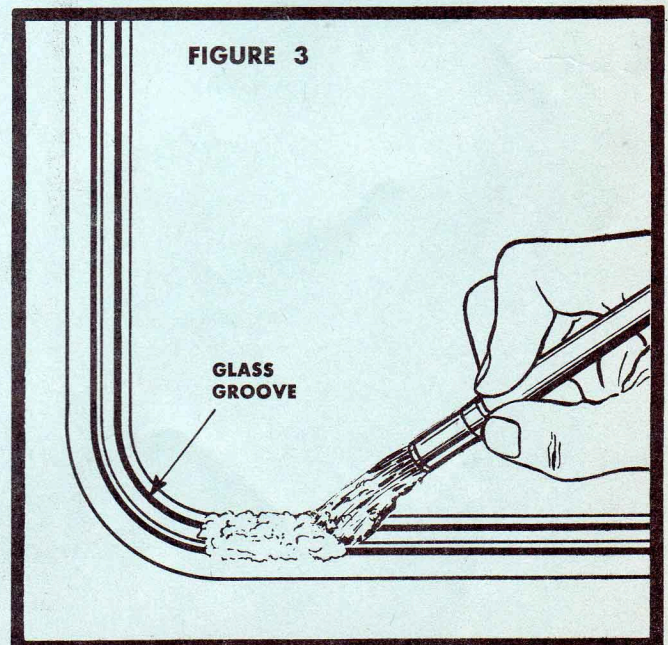


FIGURE 3

Apply liberal application of soap water to grooves of moulding.